

01/06/99
JCS14 U.S. PTO

Express Mail #EL193416010US
PATENT

JCS11 U.S. PTO
09/226418
01/06/99

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

AHMED A. HASSAN
BRIAN K. HAMILTON
HIEU T. NGO

Group Art Unit _____

Serial No.: _____

Examiner: _____

Filed: Herewith

Title: **GUST ALLEVIATION/FLUTTER SUPPRESSION DEVICE**

Commissioner of Patents and Trademarks
Box PATENT APPLICATION
Washington, D.C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith are:

1. A new application for an original utility patent, consisting of 1 cover page, 21 pages specification including 6 pages of claims, a 1 page abstract, and 7 sheets (Figs. 1-9(c)) of informal drawings.
2. The application further includes a Declaration and Power of Attorney executed by the inventor.

CLAIMS AS FILED						
<u>Claims Filed</u>	<u>Claims Allowed</u>	<u>Extra</u>	<u>Rate</u>	<u>Basic Fee</u>		
				\$760.00		
Total						
Claims <u>22</u>	- 20	= 2	x \$18.00 =	\$ 36.00		
Independent						
Claims <u>3</u>	- 3	= 0	x \$78.00 =	0.00		
Filing Fee Calculation:				<u>\$796.00</u>		

3. An assignment of the invention to McDonnell Douglas Helicopter Company is transmitted concurrently herewith.

4. The total fees to be paid are as follows and are enclosed in the form of a check in the amount of \$836.00 payable to the Commissioner of Patents and Trademarks:

Basic filing fee (as calculated above):	\$796.00
Assignment recording fee:	<u>40.00</u>

Total Fees Due:	<u>\$836.00</u>
-----------------	-----------------

6. The Commissioner is hereby authorized to charge any deficiency calculated above to Deposit Account No. 02-4467. A duplicate copy of this Transmittal Letter is enclosed.

BRYAN CAVE LLP

By 

John D. Titus, Reg. # 39,047
Two North Central Avenue
Suite 2200
Phoenix, AZ 85004-4406
Telephone: (602) 364-7000

Date: 6 Jan 1999


CERTIFICATE OF EXPRESS MAIL UNDER 37 CFR 1.10

Date of Deposit: January 6, 1999

"Express Mail" Label Number: EL193416010US

I hereby certify that this document and any referred to herein as enclosed or attached are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


Dawn Dydahl, Legal Secretary

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR UNITED STATES PATENT

Title: **GUST ALLEVIATION/FLUTTER SUPPRESSION DEVICE**

Inventors: **AHMED A. HASSAN
MESA, ARIZONA**
**BRIAN K. HAMILTON
MESA, ARIZONA**
**HIEU T. NGO
MESA, ARIZONA**

Assignee: **MCDONNELL DOUGLAS HELICOPTER COMPANY
MESA, ARIZONA**

Attorneys: **BRYAN CAVE, LLP
Two North Central Avenue, Suite 2200
Phoenix, Arizona 85004
Telephone: (602) 364-7000**

GUST ALLEVIATION/FLUTTER SUPPRESSION DEVICE

This application claims the benefit of Provisional Application No. 60/071,140
titled ZERO-MASS AIR JETS FOR CONTROL AND BVI NOISE REDUCTION,
5 filed January 12, 1998; and Provisional Application No. 60/071,142 titled
REDUCING SHOCK WAVE STRENGTH/HSI NOISE USING ZERO-MASS JETS,
filed January 12, 1998; the contents of which are incorporated herein by reference.

This application is a continuation-in-part of U.S. Application Serial No.
08/869,725 filed June 5, 1997 and titled OSCILLATING AIR JETS FOR
10 HELICOPTER ROTOR AERODYNAMIC CONTROL AND BVI NOISE
REDUCTION; and U.S. Application Serial No. 08/869,372 filed June 5, 1997 and
titled OSCILLATING AIR JETS ON AERODYNAMIC SURFACES; both of which
are commonly assigned and the contents of which are incorporated herein by
reference.

15 This application is related to U.S. Application Serial No. 08/251,329 filed May
31, 1994 and titled BLADE VORTEX INTERACTION NOISE REDUCTION
TECHNIQUES FOR A ROTORCRAFT, which issued as U.S. Patent No. 5,588,800;
co-pending U.S. Application Serial No. 08/727,980 filed October 9, 1996 (now U.S.
Patent No. 5,813,625 issued September 29, 1998) and titled ACTIVE BLOWING
20 SYSTEM FOR ROTORCRAFT VORTEX INTERACTION NOISE REDUCTION;
and co-pending U.S. Application Serial No. 08/869,372 filed June 5, 1997 and titled
OSCILLATING AIR JETS ON AERODYNAMIC SURFACES; all of which are
commonly assigned and the contents of which are incorporated herein by reference.

FIELD OF THE INVENTION

The present invention relates generally to aerodynamic surfaces and, more particularly, to improved constructions and control schemes for such surfaces that
5 provide aerodynamic control and significant reduction of the negative effects of non-uniform flow over such surfaces.

BACKGROUND OF THE INVENTION

Aerodynamically-driven oscillations (ADO) have long been recognized as one
10 of the more serious problems facing the structural integrity and maintainability of aerospace vehicle components such as fixed wings and rotor blades. ADO can, when coupled with the natural frequencies of the component, result in resonance causing large deformations and, consequently, the rapid fatigue of the component. Component fatigue, in turn, results in a shorter life cycle and, in severe conditions,
15 can cause failure of the component.

Aerodynamically-driven oscillations of structural components cause a phenomenon known as flutter. Flutter can occur over a wide range of operating conditions spanning the lower end of subsonic flow up to transonic flow. In the absence of ADO, aerospace vehicle components are more tolerant to variations in
20 their design, operating conditions and, more importantly, less susceptible to costly structural failures and repairs. Accordingly, flutter suppression technology is highly sought after by an aerospace community faced with escalating costs of component production and maintainability.

Among the known factors directly affecting the intensity of ADO are the magnitude and frequency parameters of unsteady aerodynamic forces (e.g., shed wakes or free stream gusts) to which the component is subjected. To suppress the onset of flutter, these forcing parameters can be affected using an active control technique. A common prior art device used for gust alleviation and the suppression of flutter is an active trailing edge aileron-like control surface. The oscillatory motion of the controller is desirably 180 degrees out of phase with the unsteady motion caused by the aerodynamic forcing. However, this control technique requires the use of a mechanical actuator and linkages to control the motion of the aileron-like surface. Further, aileron-like surfaces necessarily introduce aerodynamic surface discontinuities that undermine aerodynamic efficiencies and increase the radar cross-section signature of the aircraft.

Accordingly, what is needed in the art is a device that will suppress the onset of flutter in an aircraft component while minimizing or eliminating associated moving parts and discontinuities of the component surface.

SUMMARY OF THE INVENTION

According to principles of the present invention, an active control device is disclosed comprising an array of actively controlled oscillating air jets disposed on an aircraft structure. In a preferred embodiment, the device senses parameters associated with incipient unsteady aerodynamic excitation, such as free stream gusts, shed wakes in rotor and turbomachinery flows, or oscillatory motion of trailing edge control surfaces such as ailerons. These parameters are provided as input signals to a

processor. Based on the input signals, the processor generates output signals that are used to operate the air jet array in a manner counteractive to the unsteady forcing. The air jet array can be used on numerous aircraft structures, including rotor blades, wings, engine inlets, engine exhausts, blunt surfaces and nozzles.

5

BRIEF DESCRIPTION OF THE DRAWING

The invention will be better understood from a reading of the following detailed description taken in conjunction with the drawing figures in which like reference designators are used to designate like elements, and in which:

10 FIG. 1 is a cross-sectional view of an oscillating air jet actuator in accordance with the present invention;

 FIG. 2 is a schematic cross-sectional view of an airfoil incorporating principles of the present invention;

15 FIG. 3 is a schematic block diagram illustrating the function of a processor and controller according to the present invention;

 FIGS. 4(a) through 9(c) illustrate results obtained during wind tunnel testing and from computational fluid dynamics simulations of airfoils incorporating features of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The drawing figures are intended to illustrate the general manner of construction and are not to scale. In the description and in the claims the terms left, right, front and back and the like are used for descriptive purposes. However, it is to

be understood that the embodiment of the invention described herein is capable of operation in other orientations than are shown and the terms so used are only for the purpose of describing relative positions and are interchangeable under appropriate circumstances.

5 FIG. 1 illustrates an oscillating air jet actuator 21 (also known as a zero-net-mass jet ("ZNMJ")) incorporating principles of the present invention and disposed on an aerodynamic surface 23. Air jet actuator 21 comprises a diaphragm 25 formed of a piezoelectric material. Diaphragm 25 is preferably supported between a first conductor 28 and a second conductor 30. Diaphragm 25 is reciprocatably movable in
10 the directions of arrows A1 between a first position indicated by the reference numeral 25 and a second position indicated by the phantom lines 32.

 A frame 35 secures first conductor 28 and second conductor 30 to aerodynamic surface 23. An oscillating current is provided to diaphragm 25 via first conductor 28 and second conductor 30 to thereby electrically stimulate diaphragm 25
15 to oscillate in the directions of arrows A1. Frame 35 and diaphragm 25 combine to form a sealed chamber 37 having a common wall with aerodynamic surface 23.

 An aperture 41 is formed in aerodynamic surface 23 to facilitate movement of air out of and into sealed chamber 37 in response to positive and negative pressures generated within sealed chamber 37 by diaphragm 25. When diaphragm 25 moves in
20 a direction toward aerodynamic surface 23, a positive pressure is produced within sealed chamber 37 resulting in a flow of air out of aperture 41. Conversely, when diaphragm 25 moves away from aerodynamic surface 23, a negative pressure within

sealed chamber 37 is established and, consequently, air is drawn into sealed chamber 37 through aperture 41.

The alternation of air into and out of sealed chamber 37 through aperture 41 may be referred to as a zero-net-mass jet, for the net mass of air flow into and out of aperture 41 is equal to zero during one complete oscillation cycle of diaphragm 25. Because the airflow in and out of aperture 41 has an associated momentum, the zero net mass flow through aperture 41 does have a net effect on the airstream at locations external of aperture 41. Thus, the zero net mass flow through aperture 41 may be used to suppress aerodynamically driven oscillations and/or affect gross lift and drag of an aerodynamic surface as hereinafter described.

FIG. 2 illustrates an airfoil 47 of substantially the type used as an aircraft fixed wing or a helicopter rotor blade. Airfoil 47 has an upper surface 48, a lower surface 50, a trailing edge 49 and a leading edge 51. In accordance with principles of the present invention, an upper pressure transducer 52 and a lower pressure transducer 53 are positioned at or proximal to leading edge 51. Preferably, upper pressure transducer 52 is positioned above and lower pressure transducer 53 is positioned below the mean aerodynamic chord 57 of airfoil 47. An upper array of oscillating air jets 45 is disposed along top surface 48 proximal trailing edge 49. A lower array of oscillating air jets 46 is disposed along bottom surface 50, also proximal trailing edge 49. Both upper and lower arrays 45, 46 consist of a plurality of oscillating air jets, each of which are substantially identical to oscillating air jet actuator 21 shown in FIG. 1. In the preferred embodiment, arrays 45, 46 extend a distance equal to 5-8% of the chord length on both the upper and the lower surfaces of airfoil 47.

During flight of an aircraft to which airfoil 47 is attached, transducers 52, 53 operate to sense non-uniform airflow parameters associated with incipient variations in lift. Such non-uniform airflow may be in the form of gusts or shed wakes, or may result from oscillation of a control surface or other phenomenon. These sensed parameters are communicated as input signals to a processor/controller 56, comprising a processor 54 and a controller 55. Processor/controller 56 activates either the upper array 45 or lower array 46 in response to the signals to neutralize the effects of the detected non-uniform flow as is more fully discussed hereinafter.

FIG. 3 is a schematic control diagram illustrating the sensing of incipient non-uniform airflow parameters and the derivation therefrom of control commands activating arrays 45 and/or 46 for suppression of an exemplary gust-induced perturbation. As represented in block 58, transducers 52, 53 cooperate to determine the frequency $F1$ and phase angle $\phi1$ of a gust or other potential perturbation. Simultaneously, as represented in block 59, transducers 52, 53 cooperate to determine the amplitude $a1$ (either positive or negative) of the gust-induced mean lift force acting on the airfoil. Transducers 52 and 53 preferably comprise conventional static pressure transducers having a frequency response capable of detecting the dominant frequency of the perturbations, e.g., 60-70 Hz for gust perturbations and 1000-2000 Hz for blade vortex interactions. The location of the pressure transducers 52, 53 above and below the mean chord 51 permits the static pressure signal to be directly converted into an indicator of the lift perturbation caused by the gust. The values $F1$, $\phi1$ and $a1$ are communicated as input signals to processor 54.

As represented in block 60, processor 54 determines the sign of a_1 . If the non-uniform airflow pressure (absolute) detected by lower transducer 53 exceeds that detected by upper transducer 52, the sign of a_1 is positive and is indicative of an incipient increase in lift of airfoil 47. Conversely, if the non-uniform airflow pressure (absolute) detected by lower transducer 53 is less than that detected by upper transducer 52, the sign of a_1 is negative and is indicative of an incipient decrease in lift of airfoil 47. As represented in block 61, if the sign of a_1 is positive, a signal is generated instructing controller 55 to select for activation upper array 45. Activation of upper array 45 produces a decrease in the lift of airfoil 47 necessary to counteract the incipient positive lift perturbation. As represented in block 62, if the sign of a_1 is negative, a signal is generated instructing controller 55 to select for activation lower array 46. Activation of lower array 46 produces an increase in the lift of airfoil 47 necessary to counteract the incipient negative lift perturbation.

Block 63 represents a database containing information on various system states of airfoil 47 (i.e., the overall mean lift response of the airfoil with the controller being active as a function of the amplitude of the excitation, a_1 and the amplitude of the controller, a_2 , as a function of excitation frequency, F_1). Information in the database of block 63 provides the appropriate transfer function such that for the sensed values of a_1 and F_1 , the proper neutralizing output amplitude a_2 at which array 45 or array 46 is to oscillate is output to array 45 or 46.

As represented in block 64, a neutralizing output phase angle ϕ_2 at which array 45 or array 46 is to oscillate is calculated. For effective excitation neutralization, the instantaneous frequency of the neutralizing output should equal the excitation

frequency and should lag the excitation by 180 degrees. That is, a phase lag of 180 degrees should exist between excitation phase angle ϕ_1 and the output phase angle ϕ_2 .

Thus, as shown in block 64, a neutralizing output frequency F_2 at which array 45 or array 46 is to oscillate is set to the value of the perturbation frequency F_1 .

- 5 Alternatively, processor 54 may include a spectrum analyzer that can determine the dominant frequency of the perturbation to which F_2 may be set. The values F_2 , ϕ_2 and a_2 are communicated as inputs to controller 55.

As represented in block 65, if controller 55 receives the signal generated in block 61 indicative of an incipient lift-increasing perturbation, controller 55 activates
10 upper array 45. The oscillatory output of upper array 45 corresponds to F_2 , ϕ_2 and a_2 and effects a decrease in the coefficient of lift of airfoil 47. As represented in block 66, if controller 55 receives the signal generated in block 62 indicative of an incipient lift-decreasing perturbation, controller 55 activates lower array 46. The oscillatory output of lower array 46 corresponds to F_2 , ϕ_2 and a_2 and effects an increase in the
15 coefficient of lift of airfoil 47.

FIGS. 4(a) and 4(b) graphically depict wind tunnel data illustrating the effects of free stream Mach number (M_{inf}), normalized peak jet velocity (v_n), and jet oscillation frequency (F), on the measured mean sectional lift values for a rectangular wing. The results are shown for a wing having an aspect ratio of 7.37 and
20 characteristics of a NACA-0012 airfoil. The airfoil had forty-two spanwise oscillating air jet arrays, separated one inch apart, with each array comprised of four oscillating air jets between $x/C=0.54$ and $x/C=0.61$ on the lower surface of the wing, where x/C is displacement x as a percentage of chord length C . When considering the sum of the

diameters of the four jets over the overall chordwise extent of the array of oscillating air jets, the calculated surface porosity was approximately equal to 40%. For the baseline wing (i.e., with no active control being applied), the non-zero sectional lift values at a zero degree angle of attack are attributed to the error in precisely setting the model angle of attack in the wind tunnel.

FIG. 5 illustrates the measured oscillating air jet mean velocities at a point normal to the oscillating air jet exit plane displaced 0.157 inch above the exit plane and along the centerline of the jet. The velocities are shown as a function of RMS voltage (or equivalently diaphragm displacement) for a frequency of 60 Hz. The measured velocities were obtained using a 0.12 inch diameter pitot tube (United Sensor model PAC-12-KL) in quiescent flow. Differential pressures were measured using a pressure transducer (model DSA 3018/16PX-1PSID) with accuracy including linearity, hysteresis, and repeatability of ± 1 psid. Scanning of the pressure signal was performed at a rate of 200 samples/second, i.e., higher than the maximum frequency of 100 Hz for the oscillating air jet. The jet mean velocity was then computed using an expression of the Bernoulli equation. At the maximum measured peak velocity of 220 ft/s, the error in the calculated velocity (corresponding to the sum of the maximum allowable errors in both the static and total pressure values) was equal to ± 1 ft/s.

FIGS. 6(a) and 6(b) depict comparisons between the measured (3-D) and the predicted (2-D) mean sectional lift values as a function of M_{inf} , v_n and F for an angle of attack of zero degrees. With the exception of the levels of the mean lift values, all the trends observed in the measured data are reproduced through predictions. The

magnitude of the shift, especially at $Minf = 0.30$, is attributed to the turbulence model used in the predictions and to the fact that the aspect ratio is not identical for both wings (i.e., an infinite aspect ratio is implied for the 2-D predictions, and a finite aspect ratio of 7.37 is used for the wind tunnel model). Numerical studies indicate
5 that attainment of higher lift levels is possible with the increase in the number of oscillating air jets per unit array length (i.e., porosity) and/or through increasing the peak jet velocity (and hence the magnitude of the external jet momentum).

Numerical simulations based on the solutions to the 2-D Navier-Stokes (NS) equations were performed to predict how gust alleviation/flutter suppression is
10 achieved using oscillating jets in accordance with the present invention. Having established the relative accuracy of the numerical prediction method, we present results that illustrate the benefits of using two oscillating air jet arrays for gust alleviation/flutter suppression on the NACA-0012 airfoil. For brevity, we demonstrate the benefits of the device when activating it only on one surface (i.e., the
15 upper) of the airfoil (blade/wing). In the numerical simulations, five individual jets clustered over 5% of the airfoil chord comprised one of the two oscillating air jet arrays. The two arrays are placed on the upper and lower surfaces of the airfoil between the nondimensional chord positions of $x/C = 0.93$ and $x/C = 0.98$. All simulations were conducted using a 2-D, time-accurate NS flow solver assuming fully
20 turbulent flow. To simulate the beneficial effects of the device, a modified boundary condition was implemented into the flow solver to allow for the modeling of the oscillating jet velocities at the user-prescribed locations of the jets. The instantaneous

jet velocities were prescribed using a harmonic function, viz.,

$$q(T) = v_n * \sin(2 \pi f T).$$

FIG. 7 depicts a typical prescribed transpiration boundary condition for the jets. In the simulations, all jets (whether for the exciter or for the controller) were assumed to operate in unison without phase shift. For convenience, the nondimensional time required for one complete jet oscillation cycle is set equal to 1. All calculations for the baseline airfoil with the aerodynamic-driven forcing (uncontrolled problem) and for the airfoil incorporating principles of the present invention (controlled problem) were formed for a Reynolds number of 3 million and a forcing frequency of 70 Hz.

To simulate the airfoil's unsteady aerodynamic response that results from interaction with free stream gusts or from small oscillations of a trailing edge flap, as shown in FIG. 8(a), we artificially create this response through the use of an exciter comprised of an array of oscillating air jets placed on the lower surface of the airfoil near its leading edge, as shown in FIG. 8(b). Note that this is only an artificial mean for generating the unsteady aerodynamic response (hence the forcing excitation) similar to that shown in FIGS. 8(a) and 8(b). FIG. 6(b) indicates that positive mean sectional lift values are obtained for an array of exciter oscillating air jets located on the lower surface of the wing. Conversely, negative lift values will be obtained should the array of exciter oscillating air jets be placed on the upper surface of the wing.

In the absence of the induced excitation, the mean lift level is zero (due to the geometric symmetry of the NACA-0012 airfoil and the zero degree angle of attack).

Therefore, the objective here is to demonstrate that the present invention is able to restore the non-zero mean lift value shown in FIGS. 8(a) and 8(b) to the baseline airfoil value of zero. Depending on the sign of the mean lift value for the excitation, either the upper or the lower surface array of controller oscillating air jets placed in the vicinity of the airfoil's trailing edge need be activated. For example, in FIGS. 8(a) and 8(b) the sign of the mean lift is positive. This necessitates the activation of the upper surface array of controller oscillating air jets to neutralize the positive mean lift induced by the exciter. Conversely, should an array of exciter oscillating air jets be used on the upper surface to induce the excitation, it is necessary to activate the lower surface array of controller oscillating air jets.

FIGS. 9(a), 9(b) and 9(c) illustrate the predicted unsteady lift responses of the NACA-0012 airfoil, for free stream Mach numbers of 0.30, 0.60 and 0.75 respectively. Shown in the figures are the computed induced responses caused by the exciter alone (indicated by the thinner continuous line) references 901, 902, 903, the responses caused by the controller alone (indicated by the thicker continuous line) references 904, 905, 906, and the responses for the simultaneous activation of the exciter and controller (indicated by the broken line) references 907, 908, 909. The figures clearly indicate that the restoration of the sectional mean lift values induced by the exciter to the nominal baseline airfoil value of zero is possible with the careful adjustment of the amplitude of the controller.

Various modifications and alterations of the above described invention will be apparent to those skilled in the art. For example, arrays 45, 46 are not limited to placement proximal the trailing edge of airfoil 47. In addition, the oscillating air jet

assemblies may comprise oscillating piezoelectric diaphragms, such as disclosed in FIG. 1, or, alternatively, may comprise other means, such as electromagnetic actuated diaphragms and/or pistons, oscillating diverter valves or other conventional means for generating an oscillating air jet. In addition, sensory means known in the art can be substituted for pressure transducers 52, 53. In addition, each aperture in an oscillating jet array may correspond to a single diaphragm or there may be a single diaphragm per array. In addition, a feed-back control loop can be added to processor 54 to iteratively determine the amplitude a_2 that guarantees the exact attainment of the nominal sectional lift level for the baseline airfoil. Accordingly, the foregoing detailed description of the preferred embodiment of the invention should be considered exemplary in nature and not as limiting to the scope of the invention as set forth in the following claims.

WHAT IS CLAIMED IS:

1 1. An active control device for improving air flow characteristics in a vicinity of
2 an airfoil, the airfoil having an outer aerodynamic surface and an interior volume, the
3 airfoil having a chord of predetermined length, the aerodynamic surface comprising a
4 leading edge and a trailing edge, the active control device comprising:

5 at least one aperture disposed on the outer aerodynamic surface, said at least
6 one aperture communicating the outer aerodynamic surface to the interior volume;

7 a chamber disposed within the interior volume, said chamber defining a
8 volume in fluid communication with said aperture; and

9 at least one diaphragm defining a wall of said chamber, said at least one
10 diaphragm being movable between a first position and a second position, wherein
11 movement of said at least one diaphragm from said first position to said second
12 position pushes air present in the interior volume through said at least one aperture
13 and out of the interior volume, and wherein movement of said at least one diaphragm
14 from said second position to said first position draws air through said at least one
15 aperture and into the interior volume.

1 2. An active control device in accordance with claim 1, wherein:

2 said at least one aperture comprises a plurality of apertures.

1 3. An active control device in accordance with claim 2, wherein:
2 said at least one diaphragm comprises a plurality of diaphragms.

1 4. An active control device in accordance with claim 3, wherein:
2 a total number of said plurality of apertures corresponds to a total number of
3 said plurality of diaphragms.

1 5. An active control device in accordance with claim 4, wherein:
2 each of said plurality of diaphragms pushes and draws air through a
3 corresponding one of said plurality of apertures.

1 6. An active control device in accordance with claim 5, comprising:
2 a controller operatively coupled to said plurality of diaphragms, said controller
3 controlling movement of said plurality of diaphragms.

1 7. An active control device in accordance with claim 6, comprising:
2 first and second sensors operatively coupled to said controller, said first and
3 second sensors disposed on the aerodynamic surface, said first and second sensors
4 measuring a flow characteristic of air proximal said first and second sensors.

1 9. An active control device in accordance with claim 7, wherein:
2 said controller regulates an oscillation amplitude of at least one of said
3 plurality of diaphragms in response to said flow characteristic of air measured by said
4 first and second sensors.

1 10. A system in accordance with claim 7, wherein:
2 said first and second sensors comprise at least one pressure transducer.

1 11. An active control device in accordance with claim 1, wherein:
2 said at least one aperture is disposed on the outer aerodynamic surface
3 proximal the trailing edge.

1 12. An active control device in accordance with claim 1, wherein:
2 said at least one aperture is disposed along the aerodynamic surface a distance
3 of at least 5 percent but not greater than 8 percent of the chord length from the trailing
4 edge.

1 13. An active control device in accordance with claim 7, wherein:
2 said first and second sensors are disposed proximal the leading edge.
3

1 14. A method of neutralizing the negative effects of non-uniform flow of a fluid
2 over an airfoil, the airfoil having an outer aerodynamic surface and an interior volume,
3 the airfoil having a chord of predetermined length, the aerodynamic surface
4 comprising an upper surface, a lower surface, a trailing edge and a leading edge, the
5 method comprising:

6 forming at least one aperture disposed at a first position on the aerodynamic
7 surface, said at least one aperture connecting the aerodynamic surface to the interior
8 volume;

9 drawing a first portion of the fluid through said at least one aperture and into
10 the interior volume; and

11 pushing said first portion of the fluid through said at least one aperture and out
12 of the interior volume.

1 15. A method in accordance with claim 14, wherein:

2 said drawing and pushing steps are performed by at least one diaphragm
3 disposed in the interior volume.

1 16. A method in accordance with claim 14, wherein:

2 said drawing and pushing steps are performed proximal the trailing edge.

1 17. A method in accordance with claim 14, wherein:
 2 said drawing and pushing steps are performed selectively through the upper
 3 surface and the lower surface.

1 18. A method in accordance with claim 17, comprising:
 2 selecting one of the upper surface or the lower surface through which said
 3 drawing and pushing steps are performed.

1 19. A method in accordance with claim 18, comprising:
 2 sensing parameters of the non-uniform flow; and
 3 selecting one of the upper surface or the lower surface through which said
 4 drawing and pushing steps are performed based upon said sensed parameters.
 5

1 20. A method of neutralizing perturbations caused by non-uniform flow of a fluid
 2 stream over an airfoil having a leading edge and a trailing edge, the method
 3 comprising:
 4 sensing a variable pressure associated with the fluid stream proximal the
 5 leading edge of the airfoil;
 6 computing a perturbation frequency associated with said variable pressure; and
 7 actuating an array of oscillating jets disposed proximal the trailing edge of said
 8 airfoil to cause said oscillating jets to oscillate at an actuating frequency, said
 9 actuating frequency being a function of said perturbation frequency.

10

1 21. The method of claim 20, further comprising:

2 computing a dominant frequency associated with said variable pressure and
3 causing said oscillating jets to oscillate at an actuating frequency substantially equal
4 to said dominant frequency.

5

1 22. The method of claim 20, further comprising:

2 sensing a variable differential pressure associated with said fluid stream; and
3 actuating one of a first and second array of oscillating jets disposed on an
4 upper and lower surface of said airfoil in response to the arithmetic sign of said
5 differential pressure.

[illegible]

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

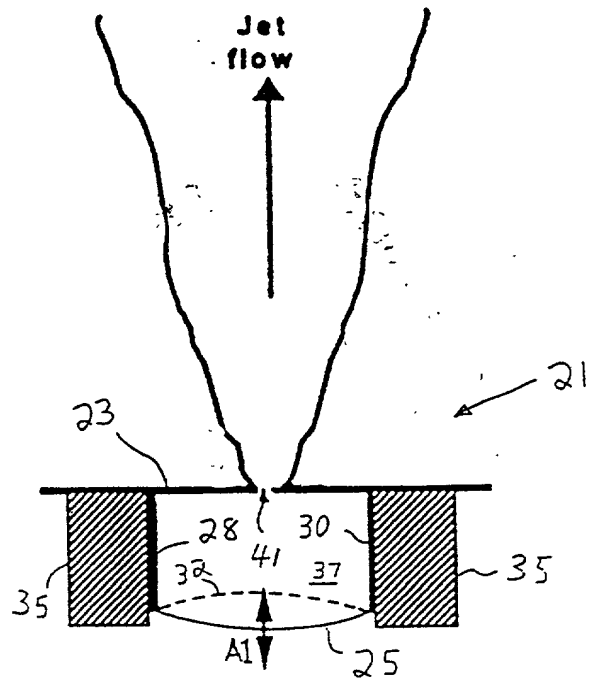


FIG. 1

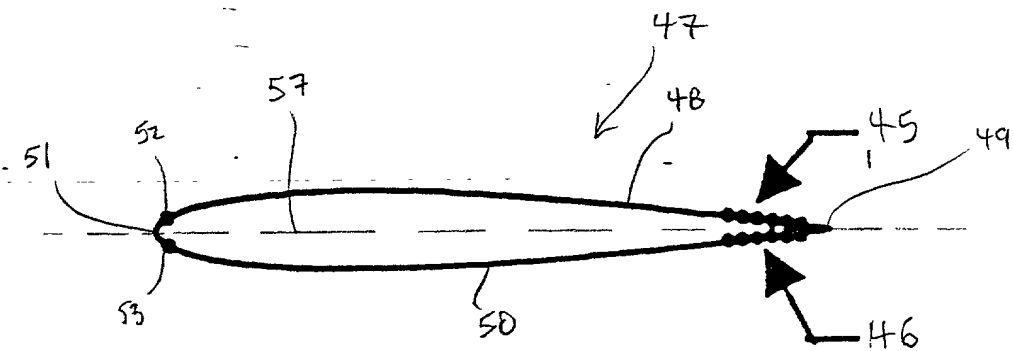


FIG. 2

660070 3749260

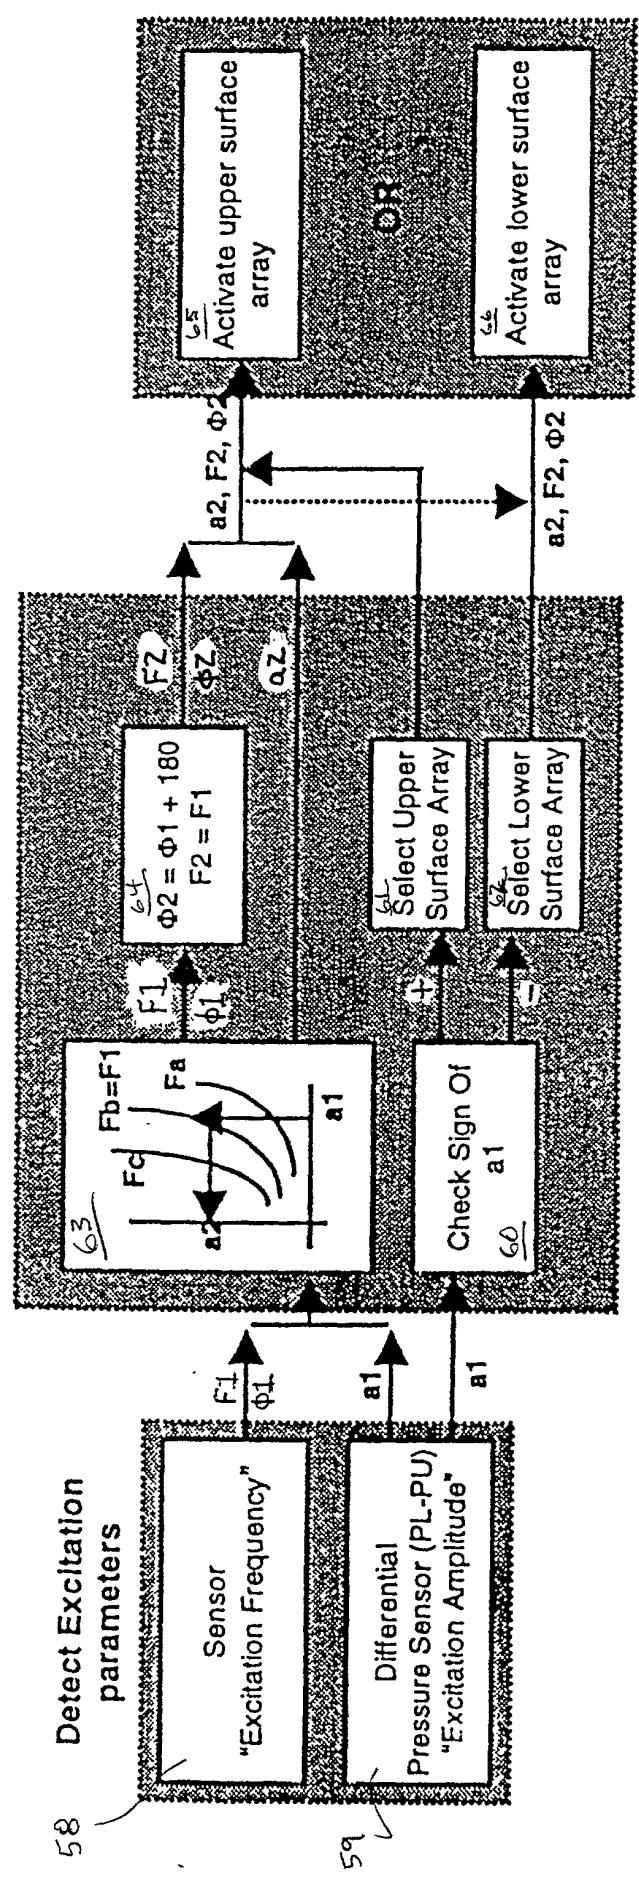


FIG. 3

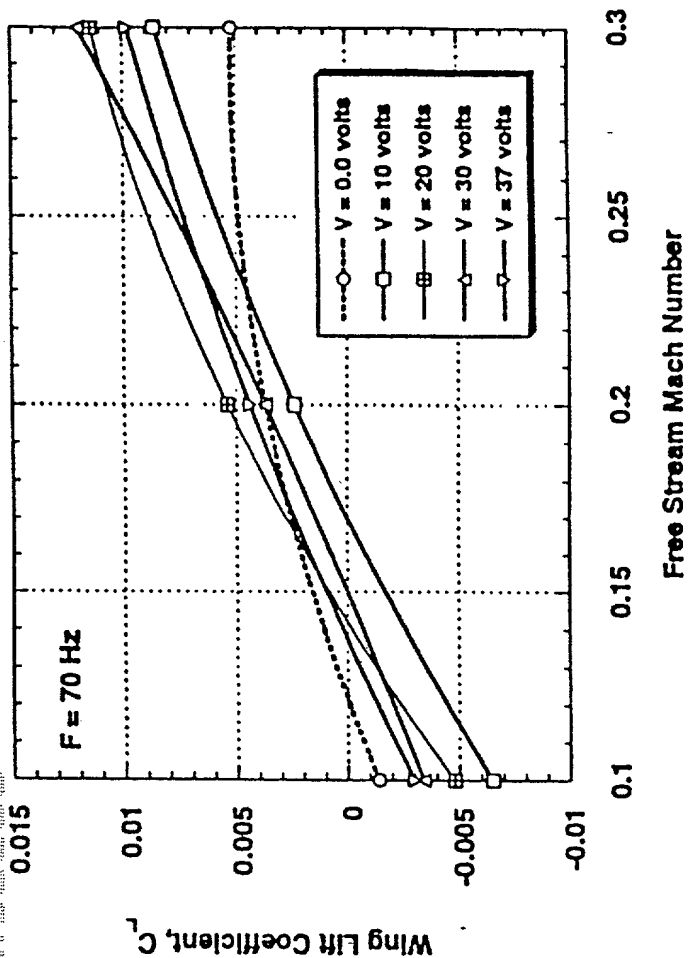


Fig. 4(b)

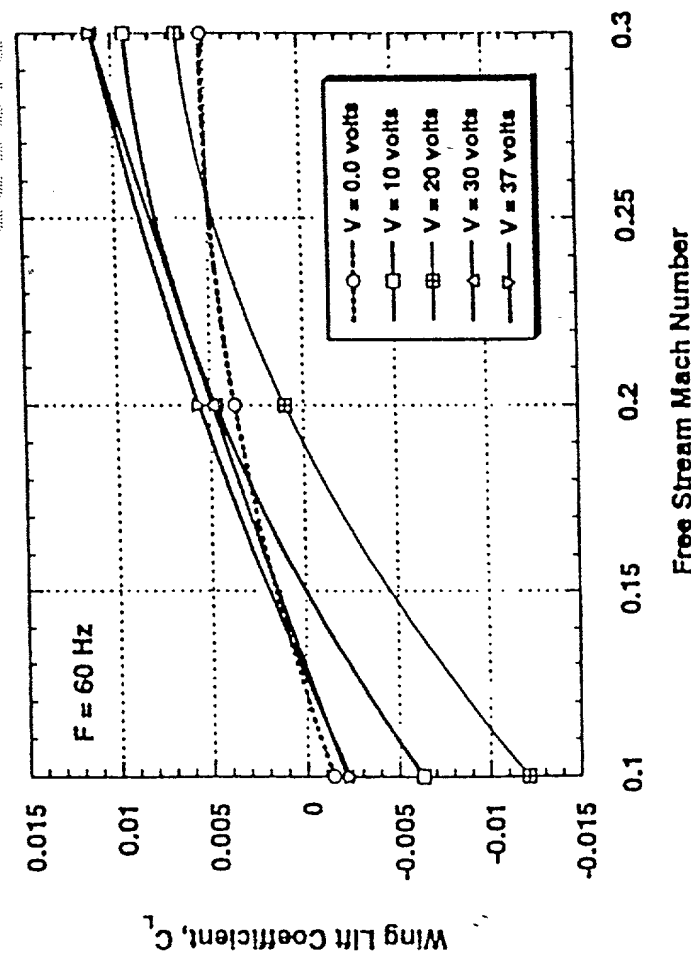


Fig. 4(a)

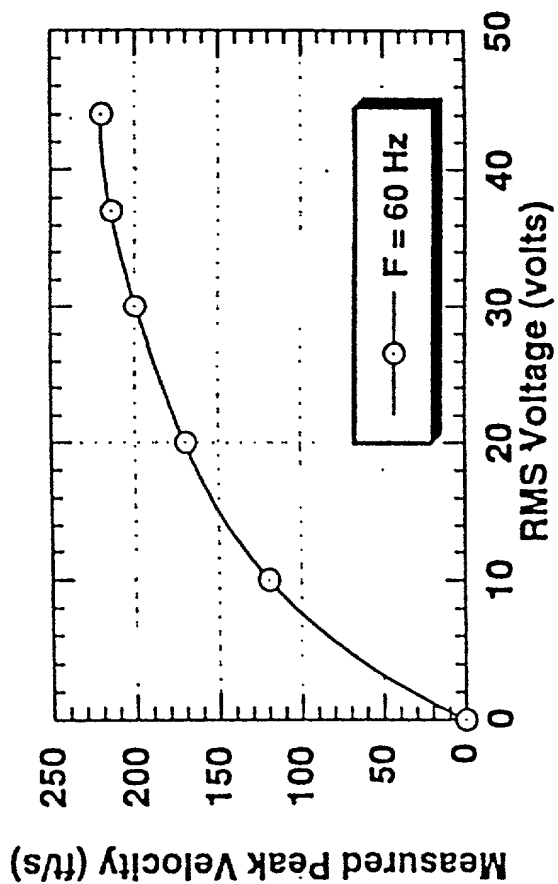


Fig. 5

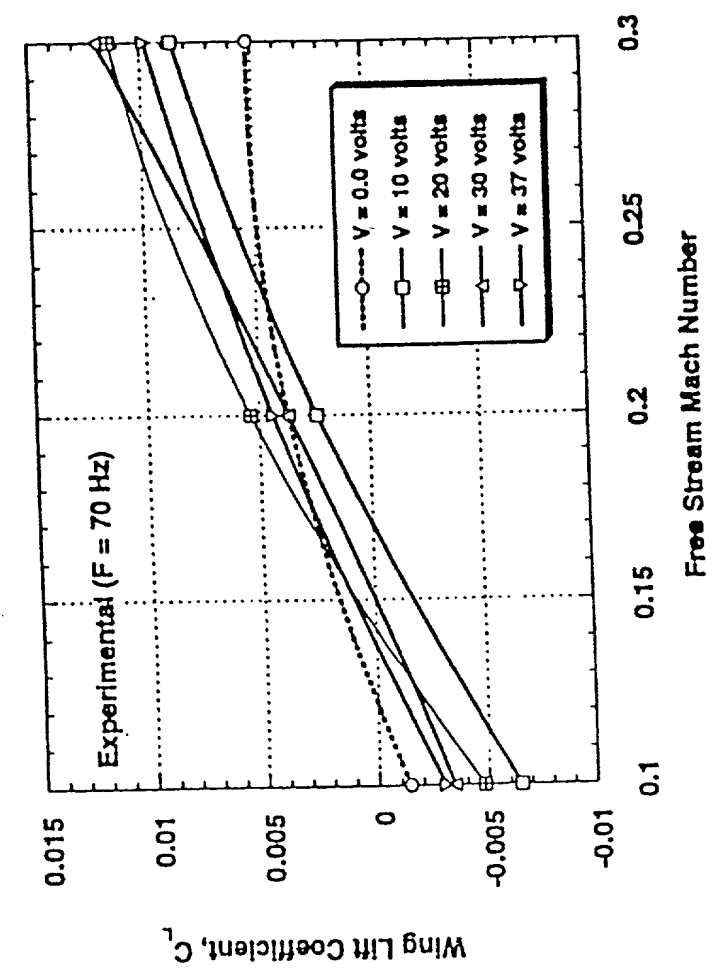


FIG. 6(a)

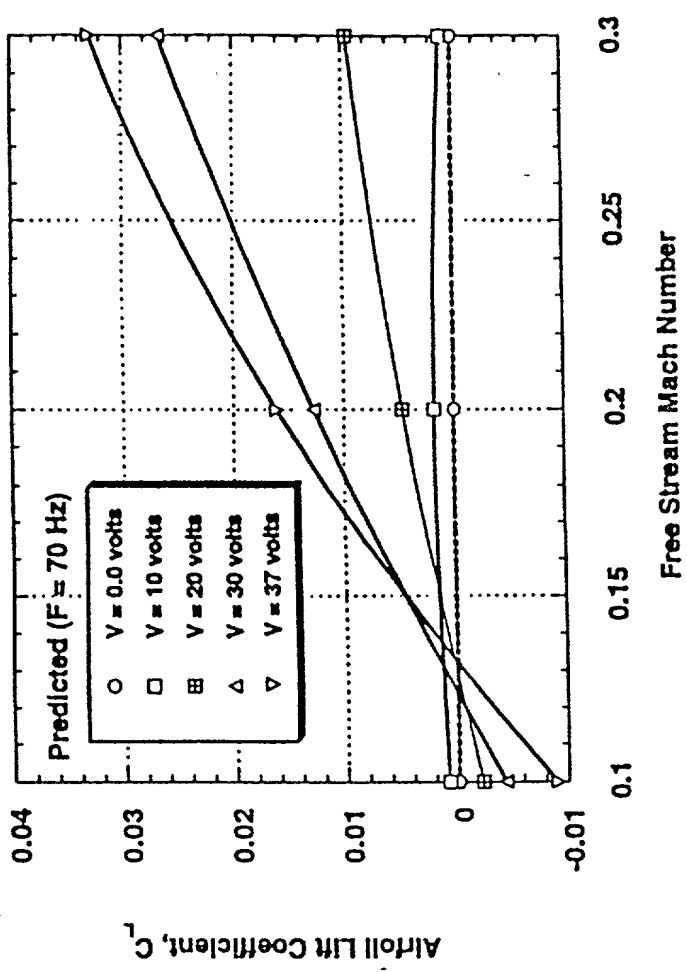


FIG. 6(b)

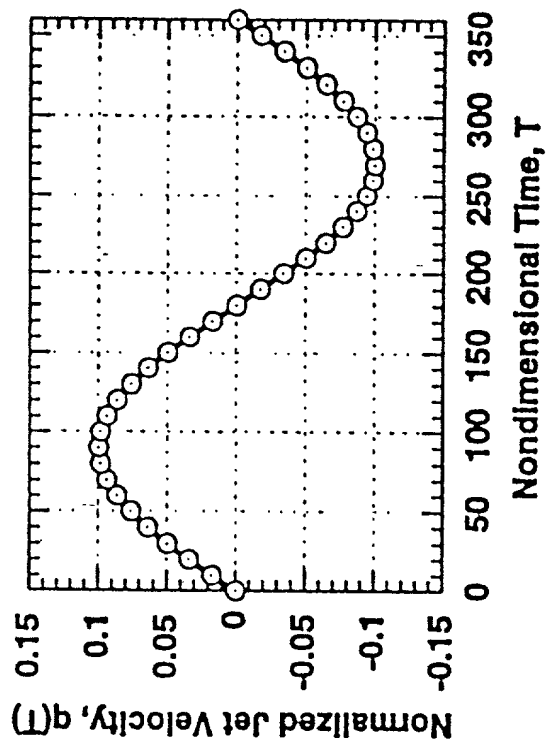


Fig. 7

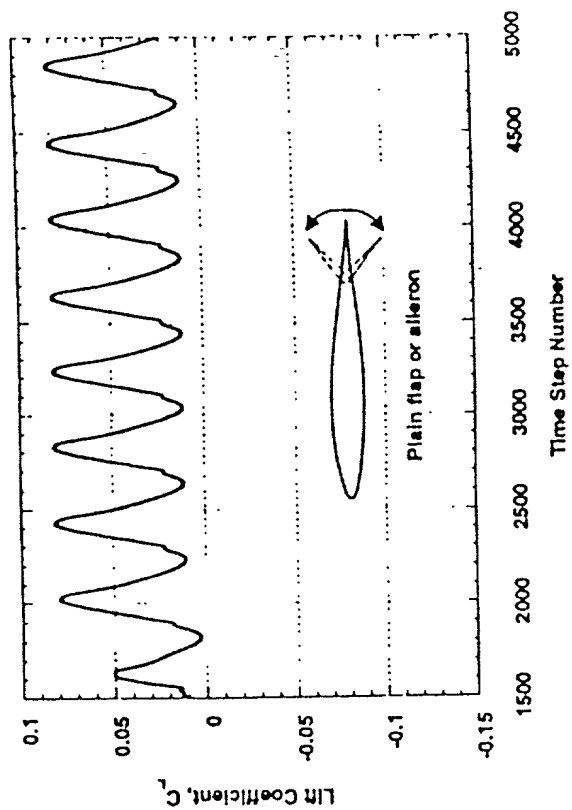


FIG. 8(a)

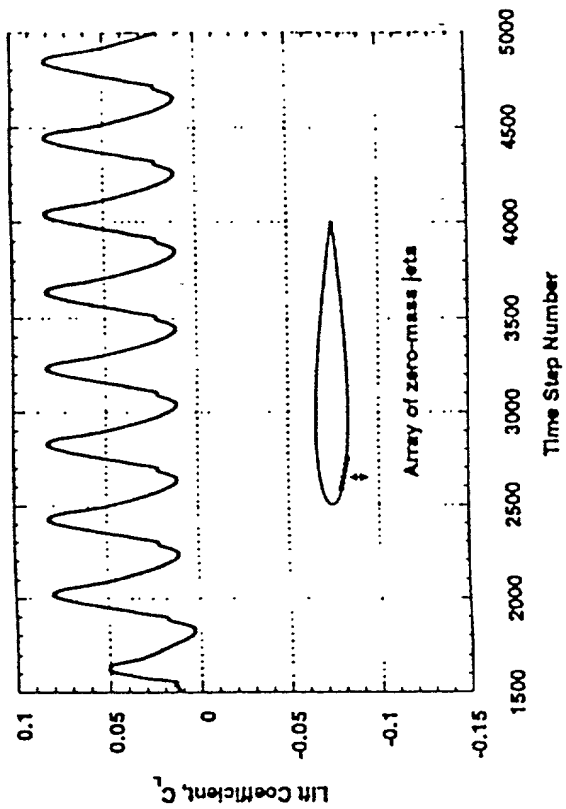


FIG. 8(b)

FIG. 9(a)



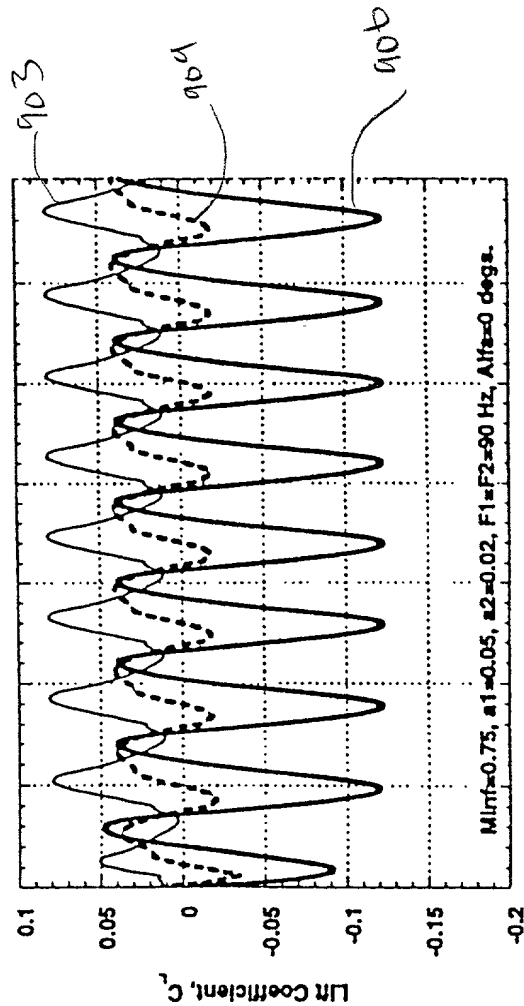


FIG. 9(b)

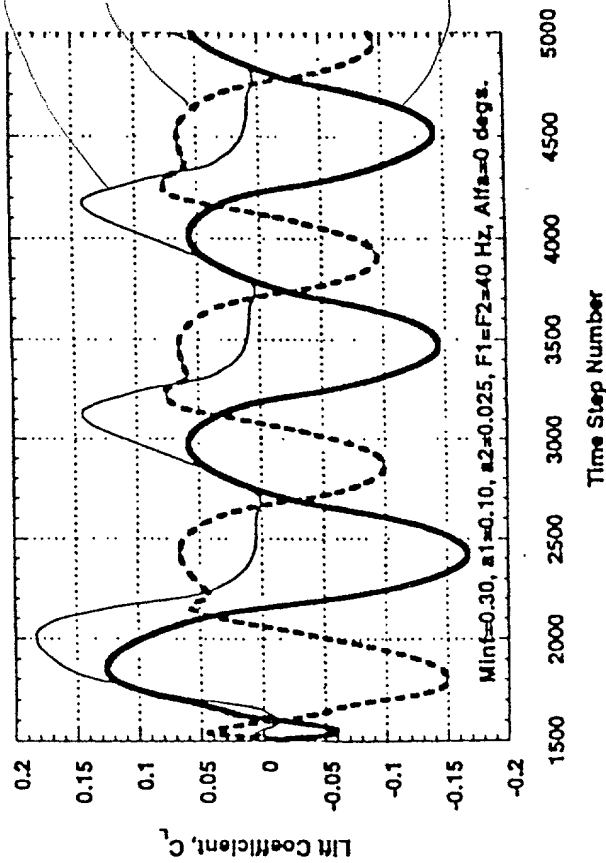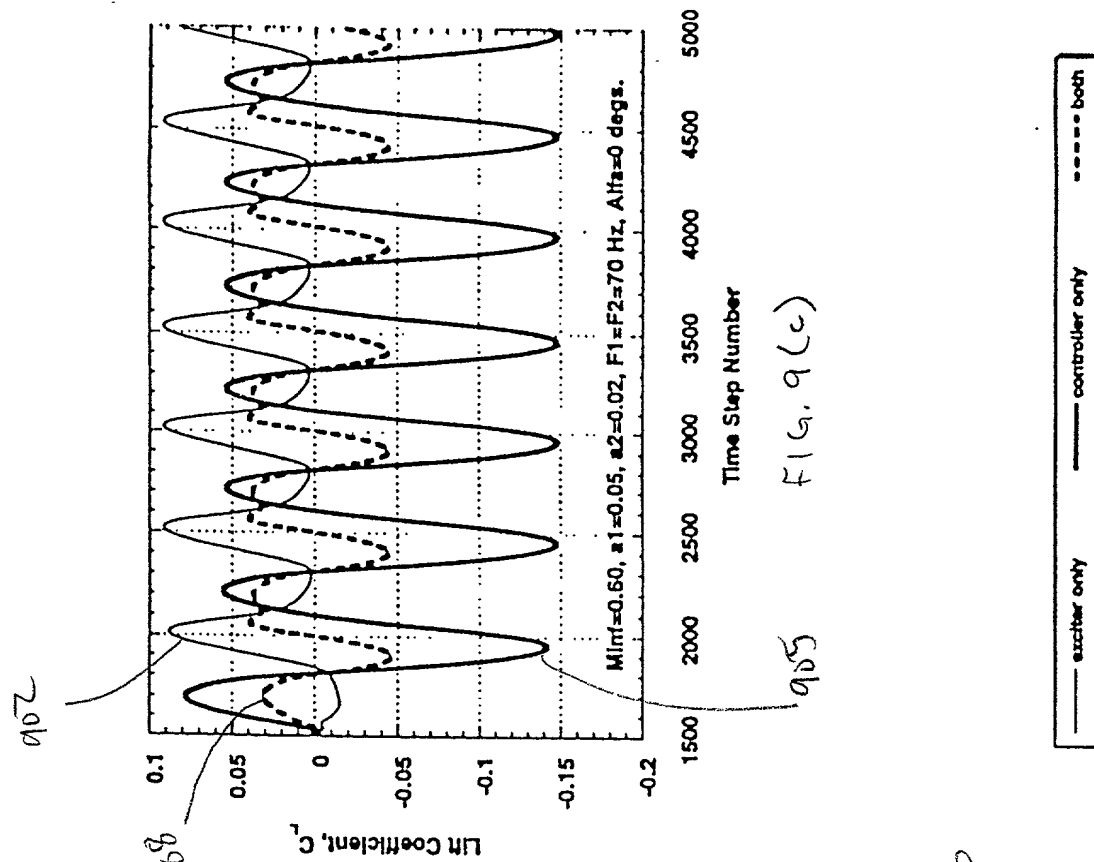

— exciter only — controller only - - - - - both

**DECLARATION AND POWER OF
ATTORNEY FOR UTILITY PATENT APPLICATION**

As the below named inventor, I hereby declare that:

My residence, post office address, and citizenship is as stated below next to my name.

I believe that I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

GUST ALLEVIATION/FLUTTER SUPPRESSION DEVICE

the specification of which is attached hereto and being concurrently filed herewith.

I hereby state that I reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information that is material to the examination of this application in accordance with 37 Code of Federal Regulations § 1.56.

I hereby claim foreign priority benefits under 35 United States Code §§ 119(a)-(d) and 365(b) of any foreign application(s) for the patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Applications: (None)

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

William C. Anderson, Reg. No. 28,147; Maurice B. Stiefel, Reg. No. 18,479; Lawrence G. Kurland, Reg. No. 24,895; Stephen P. Gilbert, Reg. No. 27,893; Mark E. Waddell, Reg. No. 31,803; David A. Roodman, Reg. No. 35,663; Whitney Wilson, Reg. No. 38,661; Daniel A. Crowe, Reg. No. 39,644; Timothy E. Tracy, Reg. No. 39,401; Stephen M. Haracz, Reg. No. 33,397; Warren MacRae, Reg. No. 37,876; Eileen M. Ebel, Reg. No. 37,316; Leo G. Lenna, Reg. No. P-42,796; Kathleen Gribshaw, Reg. No. P-41-806; Todd S. Sharinn, Reg. No. P-42,144; Robert J. Lipka, Reg. No. P-42,807; John D. Titus, Reg. No. 39,047; Donald J. Lenkszus, Reg. No. 28,096; P.G. Scott Born, Reg. No. 40,523; and Susan Stone Rosenfield, Reg. No. 36,287.

Address all telephone calls to John D. Titus, Esq. at telephone no.
(602) 364-7321.

Address all correspondence to:

John D. Titus, Esq.
BRYAN CAVE LLP
Two North Central Avenue
Suite 2200
Phoenix, Arizona 85004-4406

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First Co-Inventor: AHMED A. HASSAN
Residence: Mesa, Arizona
Citizenship: US
Post Office Address: 3710 E. McLellan Road
Mesa, Arizona 85205
Signature of First Co-Inventor: Ahmed A. Hassan
Date: 1/9/1999

Full Name of Second Co-Inventor: BRIAN K. HAMILTON
Residence: Mesa, Arizona
Citizenship: US
Post Office Address: 949 North Sunnyvale
Mesa, Arizona 85205
Signature of Second Co-Inventor: B.K. Hami
Date: 1-4-99

Full Name of Third Co-Inventor:

HIEU T. NGO

Residence:

Mesa, Arizona

Citizenship:

U.S.

Post Office Address:

529 North Red Rock Street

Mesa, Arizona 85234

Signature of Third Co-Inventor:

Hieu T. Ngo

Date:

1/4/99